


RotaCol® - Miniline SPI DIGITAL HALL CONTACTLESS ROTARY POSITION SENSOR BUSH MOUNT - SLEEVE BEARING

12P M/Z MCB



Economical Hall effect magnetic sensor
12 mm Ø metal housing, Mini size
Hall CMOS technology, low cost
SPI - 4 wire - full duplex, Measurement range 0° - 360°
Direct SPI interface to microcontroller

1- Supply (red); 2- Ground (grey); 3- Clock (grey); 4- MOSI (grey); 5- MISO (grey); 6- chip select (grey) : **For OCF**

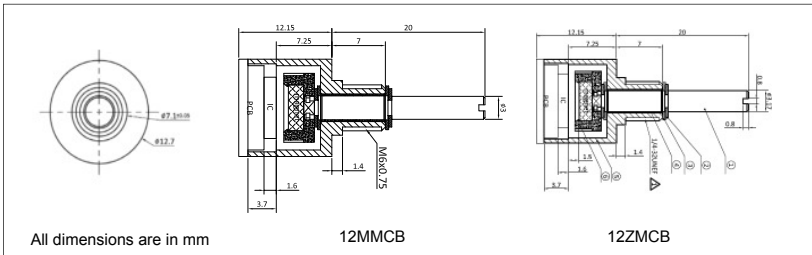

ELECTRICAL CHARACTERISTICS

Electrical angle	0 to 360°	
Electrical speed (max)	800 rpm	
Resolution	16383 steps (14 bit)	
Signal type	Supply voltage	Output signal
S33SPI	3.3V±10%	SPI - 4 wire
S05SPI	5V±10%	SPI - 4 wire
Independent linearity tolerance	± 0.5%	
Supply current (mA)	< 30 mA	
Update rate	0.6 ms	

MECHANICAL CHARACTERISTICS

Mechanical angle	0 - 360° (continuous)	
Shaft diameter and length (FMS)	Metric 3 mm Ø X 20mm (MMCB)	Inch 1/8" Ø X 20mm (ZMCB)
Bushing	Metric M6 X 0.75 (MMCB)	Inch 1/4" X 32 UNEF (ZMCB)
Mechanical speed (Max.)	800 rpm	
Rotational life	~ 10 million rotations	
Operating torque (approx.)	0.2 - 0.3 Ncm	
Operating temperature range	- 40 to +85° C	
Weight	10 gm	
Interconnection	6 core flat cable 0.15 mtr long	

MATERIAL


Housing	Aluminium anodized
Shaft	Stainless Steel
Bearing	Sleeve bearing- teflon

For full range of Rotary Sensor refer -
www.rotacol.info/rotamec.pdf

FUNCTION PRINCIPLE

The angular position and the signal generation is detected by a CMOS Hall sensor over which a parallel diametrically polarized magnet induces a magnetic field. An integrated electronic provides the output of a 2 byte WORD with an SPI interface.

SERIAL PERIPHERAL INTERFACE

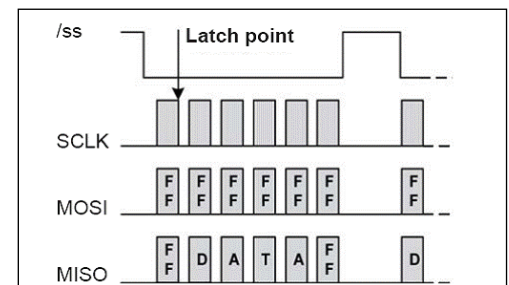

The serial peripheral interface (SPI) is a bus system for a serial synchronous data transmission between different integrated circuits. The bus consists of 4 lines MOSI, MISO, SCLK - (Serial Clock, output from master) and SS Slave Select (active low; output from master). By these signal lines the master selects the slave for communication. This is done because the master sets the SS line from high to low. The angular informations are calculated all 350 and are available for the master on demand. There is no fixed protocol for the SPI bus.

Nevertheless many microcontroller IC's have a SPI input. By programming this microcontroller IC many SPI suitable sensors can be managed by one microcontroller.

Default Version : 360° CCW Electrical & Mechanical angle counter clockwise, SPI - 4 wire, 6 core flat cable 0.15 mtr long

ORDERING INFORMATION

Refer to electrical and mechanical options on page 2

Housing diameter	Serial Peripheral Interface (SPI)	Signal	Electrical angle	Direction of rotation	Programming options	Zero point	Special cable length only for OCF (default 0.15 m long)	Output connection	
12	P	M Z	MC B	SxxSPI S05SPI S33SPI	O360	CCW	POx POZ	CVxx	OCF
12	P	M / Z	MC B	SxxSPI	O360	CCW	POZ	CVxx	OCF

Example with description - **12P MMCB S05SPI O360 CCW OCF** - 12 mm diameter, SPI interface, Miniline, RotaCol bush mount, Metric shaft (Bush Thread M6X0.75 & Shaft 3 mm Ø), 5V SPI - 4 wire, 360° angle counter clockwise, 6 core flat cable 0.15 mtr long

Please note: The specification and information in this datasheet cannot consider all special demands that are caused by the application. Because of this, they are no general description of the properties of the product. Megacraft does not assume any responsibility for damages due to improper application of our products. The user has to ensure on his own, that the products used are suitable for this application. Megacraft does not warrant the reproducibility of published information. The specifications can be changed any time without notice.

ELECTRICAL OPTIONS FOR SPI VERSION 12P M/Z MCB

RotaCol® are the latest development in rotational position sensors and contactless devices. Modern Hall IC's in combination with special magnets and RISC processors provide intelligent customizing of output signals and interfacing.

Not only precision potentiometer but also optoelectronic incremental and absolute encoders are replaced. The RotaCol® series is divided into 3 groups : analog types with analog output (replacement for precision potentiometer), incremental output (replacement of optoelectronic encoders), absolute digital SPI and SSI interface. Because of wide variety of mechanical and electrical options it is possible to use them in almost any automation and control application where rotary angular sensing is required. Regardless of the wide variety of existing technical features, the price is relative low.

SPI Bus Interface

The Serial Peripheral Interface bus or SPI bus is a synchronous serial data link standard developed by Motorola that operates in full duplex mode. One or more devices can communicate with one master. The length of the signal wire should not be longer than 0.5 mtr. To bridge larger

Zero Point Programming (POZ)

The electrical zero point is at the beginning of the signal rise. If a shaft marking is brought in line with the housing marking, the electrical zero point can be set to that position. In any case it is necessary to have a reference to the shaft marking.

MECHANICAL OPTIONS FOR SPI VERSION 12P M/Z MCB

Type / Series	Customized mechanical options
12P M/Z MCB	Special cable length

INTERCONNECTIONS

Standard Interconnections - 6 core flat cable 0.15 mtr long

MegAuto KG

Am Tummelsgrund 48
D 01156 Dresden, Germany
Tel : +49 351 6587894 0 Fax : +49 351 65878949
Email : info@megauto.de / www.megauto.de
Skype : megautodd / whats app: +491781244294

Sensall - MegAuto International

Div of Sendap Precision Electronics Pvt Ltd.
3, Electronic Sadan - I, MIDC, Bhosari, Pune - 411026, INDIA
Tel : +91 8669617194, +91 8669617195
Email : mail@megacraft.net / www.sensall.info
Skype: sendapimc / whats app: +91 8669617198

