

RotaCol® - Ecoline Speedconnect PRECISION INCREMENTAL CONTACTLESS ROTARY POSITION SENSORS - BUSH MOUNTING

Series 25I RSB
Series 30I RSB


25 mm & 30 mm Ø plastic robust housing - Bush mounting

Hall CMOS technology

A - B - Z channels- Any pulse from 2 - 128, 256, 512, 1024 ppr programmable

Following interconnections are available :

Round cable, Cable gland, Miniature connector and Terminal block

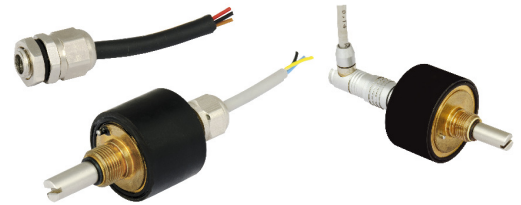

with cable gland


with connector

For full range of Rotary Sensors refer -
www.rotacol.info/rotamec.pdf

FUNCTION PRINCIPLE

A magnet rotates over the sensor IC with 4 Hall sensors for angular determination and converts the magnetic field into a measurable Hall voltage. When the magnet rotates around the longitudinal axis, sine and cosine voltages are generated to determine the angles. Two separate sine/digital converters provide A, B, Z incremental signals.

INCREMENTAL INTERFACE


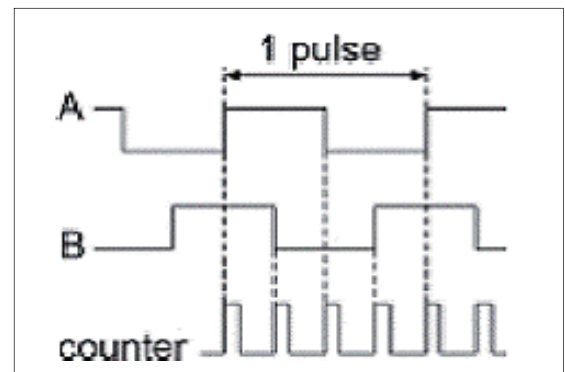


There are 3 signals for incremental output : A, B and Z. Signals A and B are quadrature signals, shifted by 90° and signal Z is a reference mark. One revolution generates N pulses of signal A or B. The reference mark signal is produced once per revolution. The width of the Z pulse is 1/4 of quadrature signal period and is matched with A high and B high. Generally, the magnetic incremental encoders are directly comparable with the conventional optical incremental encoders. They provide additional features and can much easier be adjusted to customer requirements. Nevertheless optical and magnetic incremental encoders do not provide an absolute signal.

Default Version :

360° CW Electrical & Mechanical angle, 1024 ppr, Medium Torque

1 - Supply (Red) 2 - Ch Z (Brown) 3 - Ch B (Yellow) 4 - Ch A - (Orange) 5 - Ground (Black) : For OCR, OCG
1 - Supply; 2 - Channel Z; 3 - Channel B; 4 - Channel A; 5 - Ground : For OCM, OCTA, OCTR

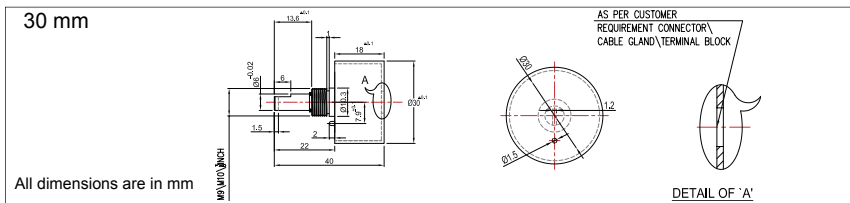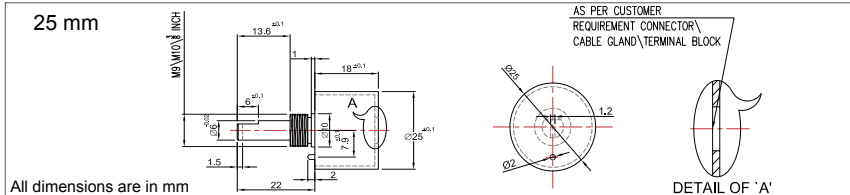

ELECTRICAL CHARACTERISTICS

Elec. Pulses	Any pulse from 2 to 128, 256, 512, 1024 ppr
Electrical speed (max.)	1600 rpm
Output signal	5V TTL, 5V / 24V Open collector
Resolution	4096 steps
Frequency response	500 KHz
Supply voltage	5V ± 10% / 9 - 30 VDC
Supply current	< 30 mA

MECHANICAL CHARACTERISTICS

Mechanical angle	(O) 360° (S) 320° +5° / - 0° with stop
Max rotating speed (max.)	800 rpm (brass) ; 3000 rpm (polymer)
Shaft diameter X length (FMS)	6 mm or 1/4 inch X 22 mm
Life: with brass sleeve bearings	~ 10 million rotations
Life: with polymer sleeve bearings	~ 15 million rotations
End stopper strength	< 80 Ncm
Operating temperature	- 40 ... +85 °C
Operating torque (Medium.)	0.5 - 1 Ncm (default)
Vibration (IEC 68-2-6, Test Fc)	±1.5 mm / 20g / 2000Hz / 16cycles
Mechanical shock (IEC 68-2-7, Test Ea)	50g / 11ms / halfsine (3X6 shocks)
Weight (25IRSB) - (gm)	60 (OCR), 70 (OCG), 30 (OCTA/R), 36 (OCM)
Weight (30IRSB) - (gm)	65 (OCR), 76 (OCG), 35 (OCTA/R), 45 (OCM)

MATERIAL

Bushing	brass
Bearing standard	sleeve bearing - brass
Bearing type: option P	polymer sleeve bearing
Housing	Nylon 66 Glass fibre reinforced
Shaft	stainless steel

ORDERING INFORMATION

Refer to electrical & mechanical option on page 2

xx	I	RS	Bx	Sxxxx	xxxx	O360/ Sxxx	CW / CCW	POx	xT	P	D	Axx	CVxx	OCxx
25/30	I	RS	B1 B2 B3	S05TTL S05OC S24OC	xxxx	O360	CW CCW	POx POZ POI	LT MT HT	P	D	Axx	CVxx	OCxx OCG OCM OCR OCTA OCTR

Example with description - **25I RSB2 S05TTL 256 O360 CW A25 OCM** - 25mm housing, incremental output, Ecoline RotaCol speedconnect, bush mounting-Thread M9 X 0.75 / Shaft 6 mm, 5V TTL, 256 ppr, without stop 360° clockwise, special shaft length 25 mm, 5 pin miniature connector

Please note: The specification and information in this datasheet cannot consider all special demands that are caused by the application. Because of this, they are no general description of the properties of the product. Megacraft does not assume any responsibility for damages due to improper application of our products. The user has to ensure on his own, that the products used are suitable for his application. Megacraft does not warrant the reproducibility of published information. The specifications can be changed any time without notice.

ELECTRICAL OPTIONS FOR INCREMENTAL VERSIONS 25/30I RSB

RotaCol® are the latest development in rotational position sensors and contactless devices. Modern Hall IC's in combination with special magnets and RISC processors provide intelligent customizing of output signals and interfacing. Not only precision potentiometer but also optoelectronic incremental and absolute encoders are replaced. The RotaCol® series is divided into three groups : analog - types with analog output (replacement for precision potentiometer), incremental output (replacement of optoelectronic encoders), absolute digital SPI and SSI output. Because of wide variety of mechanical and electrical options it is possible to use them in almost any automation and control application where rotary angular sensing is required. Regardless of the wide variety of existing technical features, the price is relative low.

Rotary incremental magnetic encoders and sensors - RotaCol® are angular position sensors with an integrated signal conditioning unit, which generates constant amplitude sine and cosine voltages which are used for angle calculation. The maximum resolution is 4096 angular measurements per revolution (0.1°). Like in the standard optical incremental encoders a rising and falling edge at channel A and channel B is available. Thus the rotational direction can be detected. The quadrature signal consist of 2 wave signal out of phase. The Z channel enables the counter to be reset to zero with the function of a non true power on absolute encoder. The programming of the position for the reference "Z" impulse in a relation to the marking on the shaft and housing can be factory set.

Number of Pulses (xxxx)

As a unique feature any number of pulses from 2 - 128 pulses per revolution (ppr) can be programmed in a 3 channel configuration. Above 128 ppr the following resolutions are possible as std option: 256, 512 & 1024. Default is 1024 ppr.

Direction of Rotation (CW / CCW)

By default the direction of rotation is clockwise (CW). With this option it is also possible to change the direction from clockwise (CW) to counterclockwise (CCW).

Start Up Performance

In the basic default version, when the sensor is switched on, first the output A-B pulses are received only if the shaft rotates. After reaching the Z pulse it is used for resetting the counter (identical to optical encoders). In this option, when the electronic is switched on, the A and B output pulses are received automatically till the Z pulse is reached. Then the counter can be reset without rotating the shaft. From this point, the A, B and Z outputs are received corresponding to the shaft rotation.

Z Pulse

A counter which is connected to the sensor is reset once per revolution by the Z - pulse. Within one rotation a simulation of non - true power on encoder is possible. In the basic type the counter is reset manually.

Zero Point Programming (POZ)

It is possible to position the Z Pulse in line with the marking on the shaft and the bushing.

Inverted Signal (POI)

The channels A and B can be inverted or not inverted independent of each other. The basic type is not inverted.


MECHANICAL OPTIONS FOR INCREMENTAL VERSION 25/30I RSB

Type / Series	Standard mechanical options	Customized mechanical options
25/30I RSB	Low torque (LT), High torque (HT); Endstop at 90°, 180°, 270°, Mu metal cap	Special shaft length ; Special endstop angle

SPEEDCONNECT OUTPUT CONNECTIONS FOR INCREMENTAL VERSION 25/30I RSB


Cable gland (OCG)

5 core round cable 1 m long




Miniature connector (OCM)

5 pin in integrated socket with plug




Terminal block - Axial (OCTA) Wires leaving axial to shaft axis

5 sockets

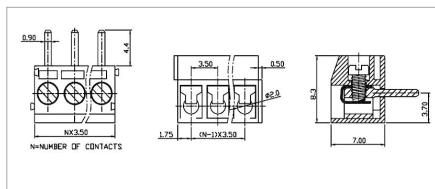

Terminal block - Radial (OCTR) Wires leaving radial to shaft axis

5 sockets

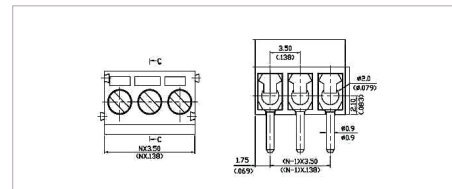

MegAuto KG

Am Tummelsgrund 48
D 01156 Dresden, Germany
Tel : +49 351 6587894 0 Fax : +49 351 65878949
Email : info@megauto.de / www.megauto.de
Skype : megautodd / whats app: +491781244294

Sensall - MegAuto International

Div of Sendap Precision Electronics Pvt Ltd.
3, Electronic Sadan - I, MIDC, Bhosari, Pune - 411026, INDIA
Tel : +91 8669617194, +91 8669617195
Email : mail@megacraft.net / www.sensall.info
Skype: sendapimc / whats app: +91 8669617198

