


RotaCol® - Ecoline Speedconnect PRECISION INCREMENTAL CONTACTLESS ROTARY POSITION SENSORS - BUSH MOUNTING

Series 25I RSB
Series 30I RSB

Ø25 mm & 30 mm plastic robust housing
Hall CMOS technology
A - B - Z channels- Any pulse from 2 - 128 programmable, 256, 512, 1024 ppr
Shock and vibration proof
Long life design
Output connections - OCG, OCM, OCTA, OCTR


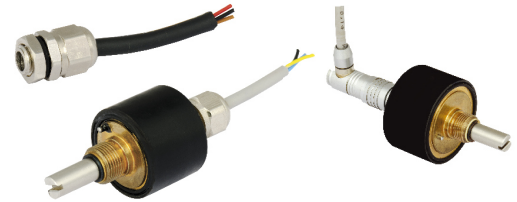


with cable gland

with connector

www.rotacol.info/25irsb.pdf

www.rotacol.info/30irsb.pdf

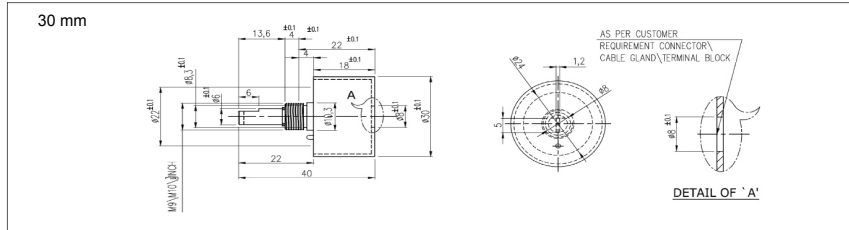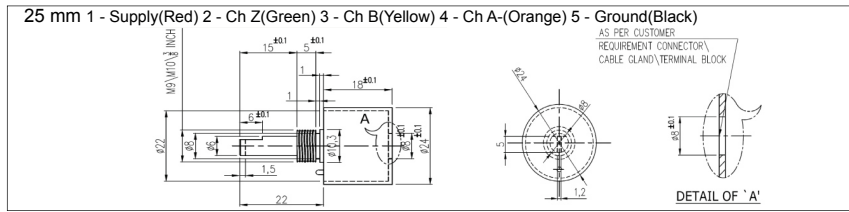

ELECTRICAL CHARACTERISTICS

Pulses	Any pulse from 2 to 128, 256, 512, 1024 ppr
Output signal	5V TTL, 5V / 24V Open collector
Resolution	4096 steps
Frequency response	500 KHz
Supply voltage	5V ± 10% / 9 - 30 VDC
Supply current	< 30 mA

MECHANICAL CHARACTERISTICS

Mechanical angle	(O) 360°
Max rotating speed (max.)	800 rpm (brass) ; 3000 rpm (polymer)
Electrical speed (max.)	1600 rpm
Life: with brass sleeve bearings	~ 10 million rotations
Life: with polymer sleeve bearings	~ 15 million rotations
Operating temperature	- 40 ... +85 °C
Operating torque (For medium)	0.5-1 Ncm (standard)
Vibration (IEC 68-2-6, Test Fc)	±1.5 mm / 20g / 2000Hz / 16cycles
Mechanical shock (IEC 68-2-7, Test Ea)	50g / 11ms / halfsine (3X6 shocks)
Output connection	OCG, OCM, OCTA, OCTR
Weight	31 gm (25I RSB) / 47 gm (30I RSB)


MATERIAL

Bearing standard	sleeve bearing - brass
Bearing type: option P	polymer sleeve bearing
Housing	Nylon 66 Glass fibre reinforced
Shaft	stainless steel

FUNCTION PRINCIPLE

A magnet rotates over the sensor IC with 4 Hall sensors for angular determination and converts the magnetic field into a measurable Hall voltage. When the magnet rotates around the longitudinal axis, sine and cosine voltages are generated to determine the angles. Two separate sine/digital converters provide A, B, Z incremental signals.

INCREMENTAL INTERFACE

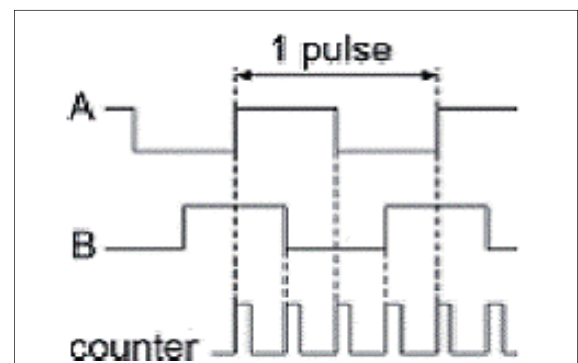

There are 3 signals for incremental output : A, B and Z. Signals A and B are quadrature signals, shifted by 90° and signal Z is a reference mark. One revolution generates N pulses of signal A or B. The reference mark signal is produced once per revolution. The width of the Z pulse is 1/4 of quadrature signal period and is matched with A high and B high. Generally, the magnetic incremental encoders are directly comparable with the conventional optical incremental encoders. They provide additional features and can much easier be adjusted to customer requirements. Nevertheless optical and magnetic incremental encoders do not provide an absolute signal.

OPTIONS AND ORDERING REFERENCES

Refer to electrical & mechanical option on page 2

xx	I	RS	Bx	Sxxxx	xxxx	CW / CCW	POx	xT	Axx	CVxx	OCxx		
25/30	I	RS	B1 B2 B3	S 05TTL S 05OC S 24OC	1024	CW CCW	POx POZ POI	LT MT HT	Axx	CVxx	OCxx		
25 & 30 mm Housing diameter		Incremental output		Signal		Clockwise (CW) Counter clockwise (CCW)		Low torque (< 0.5 Ncm) Medium torque (0.5-1Ncm) - standard High torque (1-1.5 Ncm)		Output connections			
Ecoline RotaCol Speedconnect		Bush mounting Thread M10 / Shaft Ø 6mm Thread M9 / Shaft Ø 6mm Thread 3/8" / Shaft Ø 6.35mm		No. of pulse Any pulse from 2 - 128, 256, 512, 1024 ppr		Programming options Zero point Inverted signal		Special shaft length (std 22 mm FMS)		Special cable length (standard 1m cable)		Cable gland (with 1m cable) Miniature connector Terminal block Axial Terminal block Radial	
Example with description-25I RSB2 S05TTL 256 CW POI-25mm housing, incremental output, Ecoline RotaCol speedconnect, bush mounting-Thread M9/Shaft 6mm, 5V TTL, 256 ppr clockwise, inverted signal													
Standard Version : 360° CW Electrical & Mechanical angle, 1024 ppr, MT - Medium torque													

For complete RotaCol Contactless Rotary Sensor product range refer - www.rotacol.info/rotamec.pdf

Please note: The specification and information in this datasheet cannot consider all special demands that are caused by the application. Because of this, they are no general description of the properties of the product. Megacraft does not assume any responsibility for damages due to improper application of our products. The user has to ensure on his own, that the products used are suitable for this application. Megacraft does not warrant the reproducibility of published information. The specifications can be changed any time without notice.

ELECTRICAL OPTIONS FOR INCREMENTAL VERSIONS 25/30I RSB

RotaCol® are the latest development in rotational position sensors and contactless devices. Modern Hall IC's in combination with special magnets and RISC processors provide intelligent customizing of output signals and interfacing. Not only precision potentiometer but also optoelectronic incremental and absolute encoders are replaced. The RotaCol® series is divided into three groups : analog - types with analog output (replacement for precision potentiometer), incremental output (replacement of optoelectronic encoders), absolute digital SPI and SSI output. Because of wide variety of mechanical and electrical options it is possible to use them in almost any automation and control application where rotary angular sensing is required. Regardless of the wide variety of existing technical features, the price is relative low.

Rotary incremental magnetic encoders and sensors - RotaCol® are angular position sensors with an integrated signal conditioning unit, which generates constant amplitude sine and cosine voltages which are used for angle calculation. The maximum resolution is 4096 angular measurements per revolution (0.1°). Like in the standard optical incremental encoders a rising and falling edge at channel A and channel B is available. Thus the rotational direction can be detected. The quadrature signal consist of 2 wave signal out of phase. The Z channel enables the counter to be reset to zero with the function of a non true power on absolute encoder. The programming of the position for the reference "Z" impulse in a relation to the marking on the shaft and housing can be factory set. Contrary to optical encoders, any pulse between 2 - 128 pulses per revolution can be programmed by software without disc change

Number of Pulses & Direction (xxxx CW / CCW)

As a unique feature any number of pulses from 2 - 128 pulses per revolution (ppr) can be programmed in a 3 channel configuration. Above 128 ppr the following resolutions are possible as std option: 256, 512. Default is 1024 ppr. The default direction of rotation is clockwise (CW). With this option it is also possible to change direction from clockwise(CW) to counter clockwise (CCW).

Start Up Performance

In the basic default version, when the sensor is switched on, first the output A-B pulses are received only if the shaft rotates. After reaching the Z pulse it is used for resetting the counter (identical to optical encoders). In this option, when the electronic is switched on, the A and B output pulses are received automatically till the Z pulse is reached. Then the counter can be reset without rotating the shaft. From this point, the A, B and Z outputs are received corresponding to the shaft rotation.

Z Pulse

A counter which is connected to the sensor is reset once per revolution by the Z - pulse. Within one rotation a simulation of non - true power on encoder is possible. In the basic type the counter is reset manually.

Zero Point Programming (POZ)

It is possible to position the Z Pulse in line with the marking on the shaft and the bushing. Also any offset to this marking is possible.

Inverted Signal (POI)

The channels A and B can be inverted or not inverted independent of each other. The basic type is not inverted.


MECHANICAL OPTIONS FOR INCREMENTAL VERSION 25/30I RSB

Type / Series	Standard mechanical options	Customized mechanical options
25/30I RSB	Low torque (LT) ; High torque (HT)	Special shaft length

SPEEDCONNECT OUTPUT CONNECTIONS FOR INCREMENTAL VERSION 25/30I RSB


Cable gland (OCG)

5 core cable of 1 m length




Miniature connector (OCM)

5 pin in integrated socket with plug




Terminal block - Axial (OCTA) Wires leaving axial to shaft axis

5 sockets

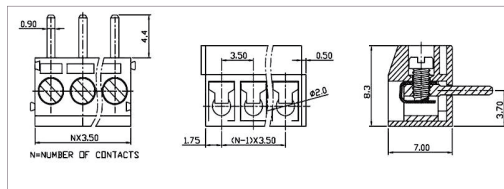

Terminal block - Radial (OCTR) Wires leaving radial to shaft axis

5 sockets

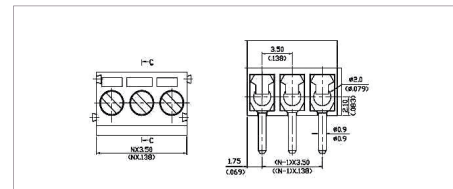

European Sales & Technical Support

MegAuto KG

Am Tummelsgrund 48
D 01156 Dresden, Germany
Tel : +49 351 6587894 0 Fax : +49 351 6587894 9
Email : info@megauto.de / www.megauto.de
a MegAuto Group Company

Worldwide Technical & Marketing Center

MegAuto International, Sensall Division

Div of Sendap Precision Electronics Pvt Ltd.
3, Electronic Sadan - I, MIDC, Bhosari, Pune - 411026, INDIA
Tel : +91 20 30681190 , +91 20 30626126
Email : mail@megacraft.net / www.sensall.info
a MegAuto Group Company

