


RotaCol® - Diamondline
'ANALOG' Output Precision Contactless Rotary Position Sensors
Clamping Flange - 2 Precision Ball Bearings

50A DRCW



Heavy duty - Metalcase - 2 Ball bearings
Hall effect magnetic
Output : 0 - 5V ratiometric, 0 - 5V, 0 - 10V, 4 - 20 mA, 0 - 20 mA
50 mm Ø robust metal aluminium housing with 2 ball bearings
Clamping flange with 3 screws.
Shock & vibration proof, Measurement range 0° - 360°

1-Supply (Yellow) 2-Output (Brown) 3-Ground (White) : **For OCR**

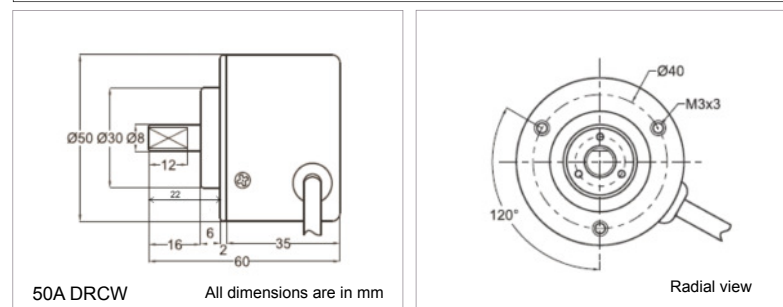

ELECTRICAL CHARACTERISTICS

Electrical angle	0 to 360°, any angle from 0 - 20... 0 - 360 programmable in steps of 1°	
Electrical speed (Max.)	160 rpm (default) / 800 rpm (optional)	
Resolution	4096 step (12 bit)	
Independent linearity tolerance	± 0.5%	
Signal type	Supply voltage	Output signal
S0505	5V ±10%	0 - 5V ratiometric
SDC05	9 - 30 V	0 - 5V
S2410	15 - 30 V	0 - 10 V
S2442	15 - 30 V	4 - 20 mA
S2420	15 - 30 V	0 - 20 mA
S05052C	5V ±10%	2 channel 0 - 5V ratiometric
SDC052C	9 - 30 V	2 channel 0 - 5V
S24102C	15 - 30 V	2 channel 0 - 10 V
Supply current	< 16 mA	
Update rate	1 ms	

MECHANICAL CHARACTERISTICS

Mechanical angle	360° (continuous)
Shaft diameter x length (FMS)	8 mm Ø X 22 mm
Protection	IP 54
Operating torque	0.05 Ncm
Operating temperature	- 40 to +85° C
Operating life	~ 75 million rotations
Mechanical speed (max.)	5000 rpm
Weight	250 gm
Interconnection	3 core round cable 2.5 mtr long

MATERIAL

Housing	Anodized aluminium
Shaft	Stainless steel
Bearings	2 precision ball bearings

ORDERING INFORMATION

Refer to electrical and mechanical options on page 2

Housing diameter	Analog output	Diamondline	RotaCol	Clamping flange with 3 screws	Signal	Electrical angle	Direction of Rotation	Programming options for non - effective electrical angle (only if elec. angle is < 360°)	Output connections	
50	A	D	RC	W	Sxxx S0505 SDC05 S2410 S2442 S2420 S05052C SDC052C S24102C	xxx any angle from 0-20 to 0-360 programmable in steps of 1° (default 360°)	CW CCW	PE1 PE2 PE3 PE4	OCR	
50	A	D	RC	W	Sxxxx	xxx	CW / CCW	PEx	POx	OCR


Example with description - **50A DRCW S2442 180CW PE1 POZ OCR** - 50mm diameter, analog output, Diamondline (Shaft 8 mm Ø), RotaCol, clamping flange with 3 screws, Signal - 4-20 mA, 180 angle and clockwise, Delta 1/2, Zero point, 3 core round cable 2.5 mtr long

For full range of Rotary Sensor refer - www.rotacol.info/rotamec.pdf

FUNCTION PRINCIPLE

The determination of angular position and signal generation is realised by an intelligent CMOS Hall sensor. A diametrical polarised magnet induces its magnetic field into the sensor. It rotates and provides a conditioned signal to the integrated electronic.

ANALOG OUTPUT

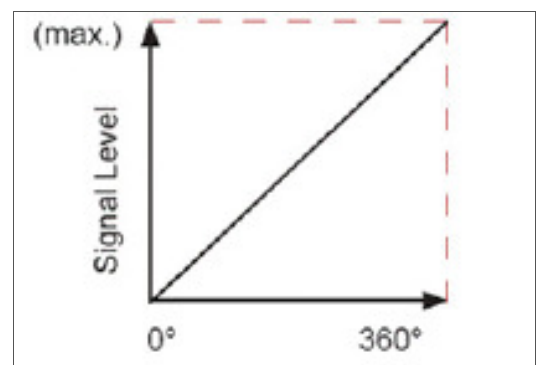

At the output of the sensor a variable voltage or variable current is provided proportional to the position of the shaft / axis over a complete angle range of 360° or a subrange. The contactless sensor electronic guarantees a steady signal level and a very low linearity error of 0.5%. With supply voltages of 5VDC ± 10% ; 9 - 30VDC ; 15 - 30V (24VDC) output signals of 0 - 5VDC ; 0 - 10VDC ; 0 - 20mA ; 4 - 20mA at the sensor output are provided. Besides this a large variety of electrical options such as Output signal level programming, Zero point programming, Centre point programming, Multipoint programming, 2 Channel redundant outputs are provided. Other options on request.

Default version :

50 mm housing, clamping flange, 2 ball bearing ,360° CW Electrical & Mechanical angle, electrical speed 160 rpm, Output signal level 0-100% ,3 Core round cable 2.5 mtr long radial

Please note: The specification and information in this datasheet cannot consider all special demands that are caused by the application. Because of this, they are no general description of the properties of the product. Megacraft does not assume any responsibility for damages due to improper application of our products. The user has to ensure on his own, that the products used are suitable for his application. Megacraft does not warrant the reproducibility of published information. The specifications can be changed any time without notice.

Electrical angle (xxx) : Standard configuration is 360°. As an option, any angle from 0-20° to 0-359° in steps of 1° can be programmed.(Price adder)

Output Signal level Programming (POL) : Standard configuration is 0-100%. Output signal can be programmed at any defined lower limit or upper limit in terms of percentage of output. Example : 10% to 90% for S0505 will give output from 0.5V to 4.5V (Price Adder).

Direction of Rotation (CW/CCW) :

CW(Clockwise) When shaft is viewed from top, and rotated in clockwise direction, output increases from minimum to maximum value(standard configuration).

CCW(Counter clockwise) when shaft is viewed from top,and rotated in counter clockwise direction,output increases from minimum to maximum value(Price adder).

Zero point Programming (POZ) :





Standard configuration is zero point without orientation. At POZ, when we do zero point programming rising ramp will start from marking on encoder housing or from the endstop CCW. Zero point can also be programmed at any defined offset from marking on the housing (Price Adder).

Center Point Programming (POC) :

Effective electrical angle is aligned with the mechanical zero point in such a way that equal effective angles in both rotating directions are achieved. Center point can also be programmed at any offset (Price Adder).

Multi Point Programming (POM) :


Output characteristics : 3 to 6 rising or falling linear segments. Minimum and maximum signal level can be defined within the total electrical angle. First and last linear segment (min./max.) is always horizontal 1 to 3 setable calibration points. (Price Adder)



Electrical options for Non - Effective electrical angle (Price Adder) : (If electrical angle is < 360°)


Delta 1/2 (PE1) :

If the electrical effective angle is programmed smaller than 360°, the remaining non-effective electrical angle is divided in two equal parts : high level & low level - Delta 1/2.




Low level (PE2) :

If the electrical effective angle is programmed smaller than 360°, after reaching the maximum, the signal level falls to low level.




High level (PE3) :

If the electrical angle is programmed smaller than 360°, the signal level remains high after reaching the full level.




Variable level (PE4) :

If the electrical angle is programmed smaller than 360°, remaining non-effective electrical angle can be divided into high and low level in any ratio according to customer request.



2 Channel Redundant Output (2C) - Special type

2 Channel Output (2C) : The sensor provides 2 operating modes: A) Redundancy i.e. channel one and channel two are identical. If one channel fails the other channel remains active.B) It is also possible to have 2 different programs in the 2 channels. For this, additional functions can be obtained.



INTERCONNECTIONS

Standard Interconnections - 3 core round cable 2.5 mtr long - radial

MegAuto KG

Am Tummelsgrund 48
D 01156 Dresden, Germany
Tel : +49 351 6587894 0 Fax : +49 351 65878949
Email : info@megauto.de / www.megauto.de
Skype : megautodd / whats app: +491781244294

Sensall - MegAuto International

Div of Sendap Precision Electronics Pvt Ltd.
3, Electronic Sadan - I, MIDC, Bhosari, Pune - 411026, INDIA
Tel : +91 8669617194, +91 8669617195
Email : mail@megacraft.net / www.sensall.info
Skype: sendapimc / whats app: +91 8669617198

