



Hall effect magnetic

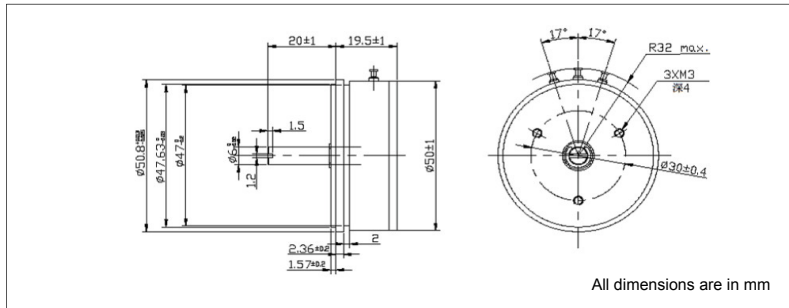
Output : 0 - 5V(ratiometric), 0 - 5V, 0 - 10V, 4 - 20mA, 0 - 20mA

50 mm Ø robust aluminium housing with two ball bearings

Synchro size 20, shock & vibration proof

Servo mount / screw fitting, Measurement range 0° - 360°

- 1- Supply (red); 2- Output (yellow); 3- Ground (black) : **For OCP**
- 1- Supply (red); 2- Output (brown); 3- Ground (black) : **For OCG, OCR**
- 1-Supply; 2-Output; 3-Ground : **For OCM, OCTA, OCTR**



All dimensions are in mm

ELECTRICAL CHARACTERISTICS

Electrical angle	0 - 360° any angle from 0 - 20..0 - 360 programmable , in steps of 1°	
Electrical speed (max.)	160 rpm (default) / 800 rpm (option)	
Resolution	4096 step (12 bit)	
Signal type	Supply voltage	Output signal
0505	5V ± 10%	0 - 5V (ratiometric)
DC05	9 - 30V	0 - 5V
2410	15 - 30V	0 - 10V
2442	15 - 30V	4 - 20 mA
2420	15 - 30V	0 - 20 mA
Supply current	< 16 mA	
Independent linearity tolerance	± 0.5%	
Update rate	1 ms	

MECHANICAL CHARACTERISTICS

Mechanical angle	360° (continuous)
Shaft diameter and length (FMS)	6 mm Ø X 20 mm
Operating torque (approx.)	0.05 Ncm
Protection	IP 40
Operating temperature	- 40 to +85° C
Operating life (approx.)	40 million rotations
Mechanical speed (max.)	9000 rpm
Weight	85 gm
Interconnection	3 pins (default)

MATERIAL

Housing	anodized aluminium
Shaft	stainless steel
Bearings	2 precision ball bearing

ORDERING INFORMATION

										Refer to electrical and mechanical options on page 2										
Housing diameter	Analog output	Metric Silverline (Shaft 6 mm Ø)	RotaCol	Servomount - with 2 ball bearings	Signal	2 Channel redundant outputs (only for voltage outputs)	Electrical angle	Direction of rotation	Programming options for non - effective electrical angle (only if elec. angle is < 360°)	Programming options	Special shaft length (default 20 mm FMS)	Special cable length - only for OCG, OCR (default 1 mtr long)	Output connections							
50	A	MSL	RC	S	S0505 SDC05 S2410 S2442 S2420	2C	xxx	CW CCW	PEX	POX POZ POC POM	Axx	CVxx	OCx	OCp OCR OCM OCG OCTA OCTR						
50	A	MSL	RC	S	Sxxxx	2C	xxx	CW / CCW	PEx	POx	Axx	CVxx	OCxx							

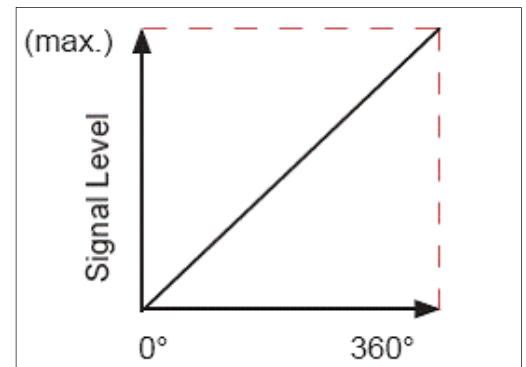
Example with description - **50A MSL RCS S2410 300 CCW PE1 OCR** - 50mm diameter, analog output, Metric Silverline (Shaft 6 Ø mm), RotaCol sensor, Servomount, Signal - 0 - 10V, 300° angle and counter clockwise, delta 1/2, 3 core round cable 1 mtr long

For full range of Rotary Sensor refer - www.rotacol.info/rotamec.pdf

FUNCTION PRINCIPLE

The determination of angular position and signal generation is realised by an intelligent CMOS Hall sensor. A diametrical polarised magnet induces its magnetic field into the sensor. It rotates and provides a conditioned signal to the integrated electronic.

ANALOG INTERFACE



At the output of the sensor a variable voltage or variable current is provided proportional to the position of the shaft / axis over a complete angle range of 360° or a subrange. The contactless sensor electronic guarantees a steady signal level and a very low linearity error of 0.5%. With supply voltages of 5VDC ± 10% ; 9-30VDC ; 15-30V (24VDC) output signals of 0 - 5VDC ; 0 - 10VDC ; 0 - 20mA ; 4 - 20mA at the sensor output are provided. Besides this a large variety of electrical options such as Zero point programming, Centre point programming, Multipoint programming, 2 Channel redundant outputs are provided.

Default Version :

360° CW Electrical & Mechanical angle, electrical speed 160 rpm, 3 pins

Please note: The specification and information in this datasheet cannot consider all special demands that are caused by the application. Because of this, they are no general description of the properties of the product. Megacraft does not assume any responsibility for damages due to improper application of our products. The user has to ensure on his own, that the products used are suitable for his application. Megacraft does not warrant the reproducibility of published information. The specifications can be changed any time without notice.

ELECTRICAL OPTIONS FOR ANALOG VERSION 50A MSL RCS

The following options are electrically programmable & are available very cost effective, with short delivery time

Non-effective Electrical Angle (PE1) - Delta 1/2

If the electrical effective angle is programmed smaller than 360°, the remaining electrical non-effective angle is divided in two equal parts : high level & low level (Delta 1/2)

Low level (PE2)

If the electrical effective angle is programmed smaller than 360°, after reaching the maximum, the signal level falls to low level.

High level (PE3)

If the electrical angle is programmed smaller than 360°, the signal level remains high after reaching the full level.

Variable level (PE4)

If the electrical angle is programmed smaller than 360°, remaining electrical non effective angle can be divided into high and low level in any ratio according to customer request.

Direction of Rotation (CW/CCW)

By default the direction of rotation is clockwise (CW). With this option it is also possible to change the direction from clockwise(CW) to counterclockwise (CCW).

Zero point Programming (POZ)

Mechanical zero point is aligned with marking on the sensor housing. Electrical zero point can be aligned to mechanical zero point. Zero point can be programmed at any offset.

Center Point Programming (POC)

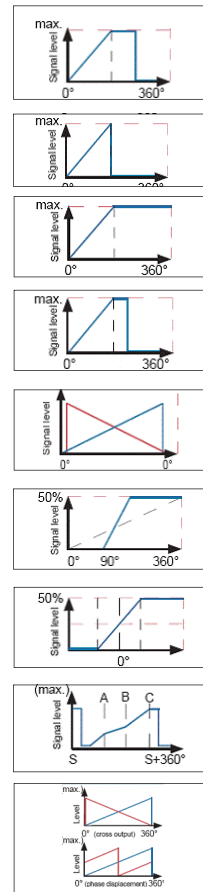
Effective electrical angle is aligned with the mechanical zero point in such a way that equal effective angles in both rotating directions are achieved. Center point can be programmed at any offset.

Multi Point Programming (POM)

Output characteristics : 3 to 6 rising or falling linear segments. Min and max signal level can be defined within the total electrical angle. First and last linear segment (min/max) is always horizontal. 1 to 3 settable calibration points.

2 Channel Redundant Output (2C)

This is realized by a Hall sensor chip consisting of 2 galvanically separated sensing elements. One magnet provides a magnetic field simultaneously for both elements. Both elements can be programmed identically, or channel 2 can also be programmed independently from channel1. (Valid only for 0505, DC05, and 2410 outputs).







MECHANICAL OPTIONS FOR ANALOG VERSION 50A MSL RCS

Type / Series	Standard mechanical options	Customized mechanical options
50A MSL RCS	Cable gland (OCG); Round cable (OCR); Terminal Block (OCTA) ; Miniature connector (OCM)	Special shaft length ; Special cable

INTERCONNECTIONS

Standard Interconnections - 3 Pins

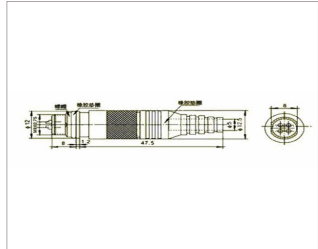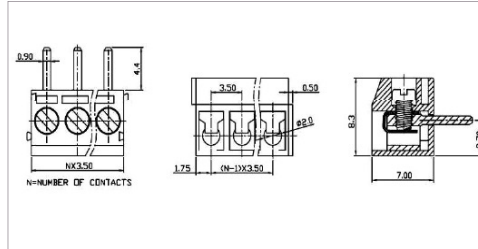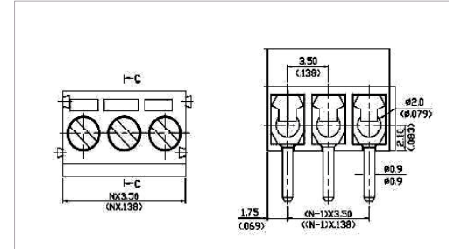Other Interconnection options

Cable gland (OCG) 3 core cable of 1 m length 	Miniature connector (OCM) 3 pin in integrated socket with plug 	Terminal block - Axial (OCTA) Wires leaving axial to shaft axis 3 sockets 	Terminal block - Radial (OCTR) Wires leaving radial to shaft axis 3 sockets 
--	---	--	---

MegAuto KG

Am Tummelsgrund 48
 D 01156 Dresden, Germany
 Tel : +49 351 6587894 0 Fax : +49 351 65878949
 Email : info@megauto.de / www.megauto.de
 Skype : megautodd / whats app: +491781244294

Sensall - MegAuto International

Div of Sendap Precision Electronics Pvt Ltd.
 3, Electronic Sadan - I, MIDC, Bhosari, Pune - 411026, INDIA
 Tel : +91 8669617194, +91 8669617195
 Email : mail@megacraft.net / www.sensall.info
 Skype: sendapimc / whats app: +91 8669617198

